

REFRIGERATION SYSTEMS

Fill your Walk-In with stored goods, NOT with an evaporator coil!


PRO³ Top Mount

Get maximum headroom in your Walk-In with our packaged systems.


Available in medium temperature and low temperature units.

These systems are fully piped and wired; ready to drop into a factory cut opening in the ceiling panels.

No refrigeration technician required.

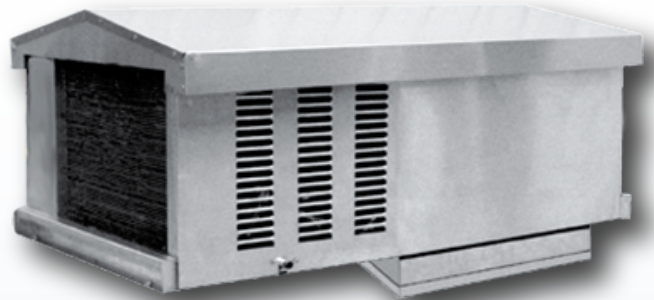

Outdoor model

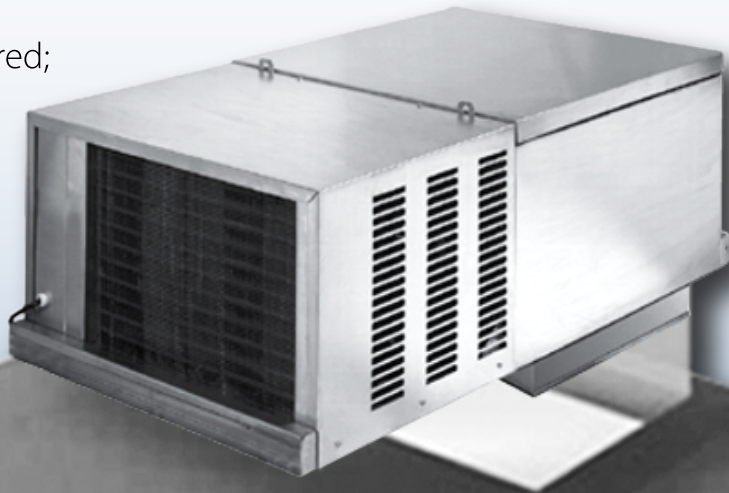

Indoor model

CONTACT US TODAY!

1-800-24BALLY

www.ballyrefboxes.com

Product Nomenclature

P T N 076 H 2 B

P=PRO³
Refrigeration
System

T=Top Mount N=Indoor

Model Size

H=Cooler Air Defrost

L =Freezer Electric Defrost

Refrigerant:

2=R-22

6=R404a

Voltage:

A=115/1/60

B=208-230/1/60

C=208-230/3/60

Performance/Electrical Data

Coolers - Air Defrost Systems

PRO-3 Model Number	BTUH@95°F.		Voltage	MCA	MOPD	Unit Amps	EVAP CFM	Plug Supplied	Matching NEMA Receptacle	Approx. Net Wts. (lbs./kg.)	
	35°F Box Temp.	38°F Box Temp.									
PTNO42H6AEA	4,360	4,570	115/1/60	11.3	15	9.3	340	YES	5-20R	92	(42)
PTNO50H6AEB	5,120	5,370	115/1/60	14.0	20	11.6	350	YES	5-20R	192	(87)
PTNO50H6BEB	5,120	5,370	208-230/1/60	7.0	15	5.9	350	YES	6-15R	192	(87)
PTNO67H6BEB	6,860	7,190	208-230/1/60	11.5	15	9.5	550	YES	6-15R	207	(94)
PTNO76H6BEB	7,500	7,840	208-230/1/60	9.3	15	7.8	500	YES	6-15R	211	(95)
PTN104H6BEC	11,190	11,810	208-230/1/60	14.8	20	12.4	875	YES	6-20R	270	(122)
PTN104H6CEC	11,190	11,810	208-230/3/60	11.0	15	9.3	875	NO	-	265	(120)
PTN133H6BEC	12,790	13,500	208-230/1/60	14.8	20	12.4	825	YES	6-20R	290	(132)
PTN133H6CEC	12,790	13,500	208-230/3/60	11.0	15	9.3	825	NO	-	285	(129)

Freezers - Electric Defrost Systems

PRO-3 Model Number	BTUH@95°F.			Voltage	MCA	MOPD	Unit Amps	EVAP CFM	Plug Supplied	Matching NEMA Receptacle	Approx. Net Wts. (lbs./kg.)	
	0°F Box Temp.	-10°F Box Temp.	-20°F Box Temp.									
PTNO31L6BEB	4,220	3,190	2,060	208-230/1/60	13.8	15	11.6	350	YES	6-15R	221	(100)
PTNO44L6BEB	5,870	4,530	3,400	208-230/1/60	15.9	20	13.3	520	YES	6-20R	225	(102)
PTNO52L6BEB	7,000	5,360	3,910	208-230/1/60	18.1	20	15.3	900	NO	-	275	(125)
PTNO52L6CEC	7,000	5,360	3,910	208-230/3/60	12.2	15	13.0	900	NO	-	270	(122)
PTNO69L6BEC	9,060	7,100	5,250	208-230/1/60	23.8	30	20.0	875	NO	-	280	(127)
PTNO69L6CEC	9,060	7,100	5,250	208-230/3/60	15.9	20	14.2	875	NO	-	275	(125)

CONTACT US TODAY!

1-800-24BALLY

www.ballyrefboxes.com



Bally Refrigerated Boxes, Inc.-
Proudly manufactured in the U.S.A.

Revised: 9/2014